








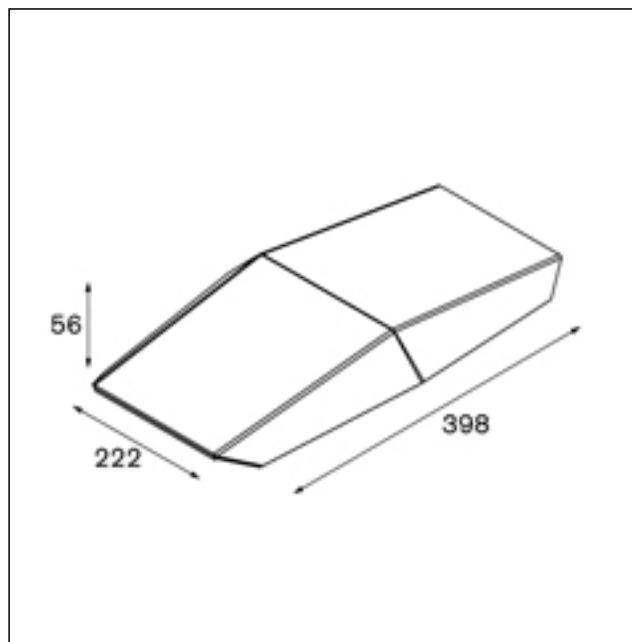


A(r)mor double LED < 450lm GI



PRODUCT DATA

Gear / transfo	gear incl., electronic
Adjustability	-
Aperture	not applicable
Weight	3.3 kg
Voltage	230V
Min. distance	0.1 m
IP	IP67
Glow wire test	960 °C
Remark	-

	WARM WHITE	ICE WHITE
desert	11170933	11170733
alu struc	11170919	11170719
black struc	11170932	11170732
khaki	11170922	11170722





A(r)mor double LED < 450lm GI black struc

LIGHTING PERFORMANCE

Source quantity	6	6
Source type	high power LED	high power LED
Colour temperature	2700K	5500K
Luminaire flux	-	-
Power consumption	1 W	1 W
Luminaire efficacy	-	-
CRI	-	-
Beam angle	-	-
Source lifetime	-	-
Type connection	-	-